

LED Triproof Light TPL-01-G2



Better solutions for a Led Triproof Light

IP65 water-proof

AC100-277V 50/60Hz

Easy Installation

115Lm/w



Options

Color
3000K
4000K
5700K


Application

Factories, Steel Mills, Steel Smelting Plants, Farms, sport Facilities & Workshops, Storage Facilities & Warehouses, Supermarkets & Department Stores, Showrooms, Design Centers & Galleries.

Specifications

Item	Power	Lumen	Leds	CRI	length	Weight	Beam Angle
BR-TPL20W-01-G2	20W	2300Lm	SMD 2835	> 80	60cm	1.55kg	120°
BR-TPL30W-01-G2	30W	3450Lm	SMD 2835	> 80	60cm	1.55kg	120°
BR-TPL30W-01-G2	30W	3450Lm	SMD 2835	> 80	90cm	1.95kg	120°
BR-TPL40W-01-G2	40W	4600Lm	SMD 2835	> 80	90cm	1.95kg	120°
BR-TPL40W-01-G2	40W	4600Lm	SMD 2835	> 80	120cm	2.35kg	120°
BR-TPL60W-01-G2	60W	6900Lm	SMD 2835	> 80	120cm	2.35kg	120°
BR-TPL60W-01-G2	60W	6900Lm	SMD 2835	> 80	150cm	2.74kg	120°
BR-TPL80W-01-G2	80W	9200Lm	SMD 2835	> 80	150cm	2.74kg	120°

Dimensions(mm)


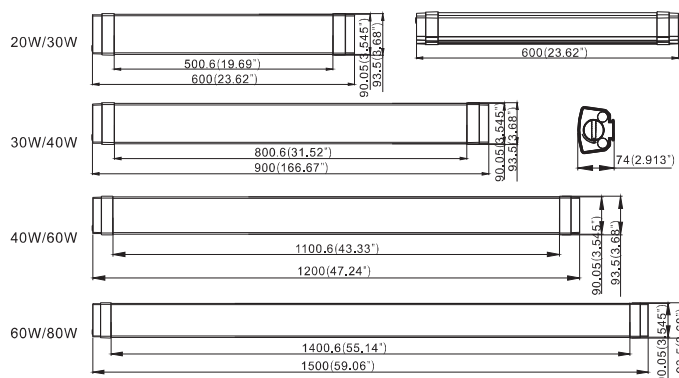


Photometry



TPL-01-G2

Installation and use

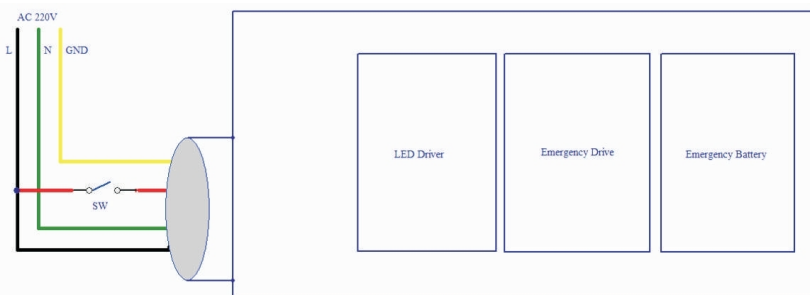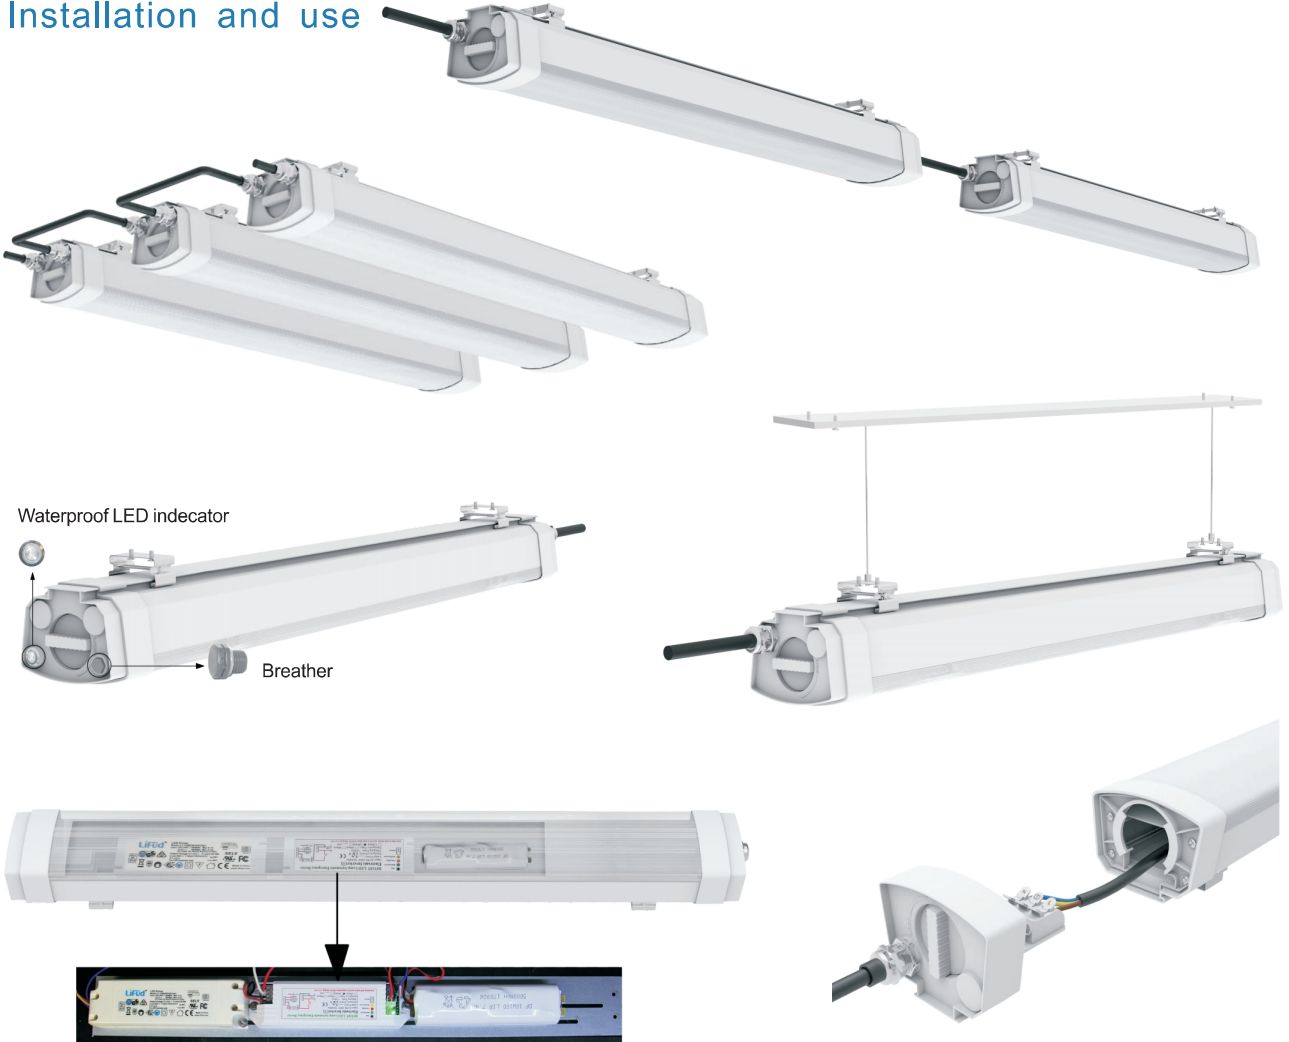

LED emergency lights external wiring diagram

Packing Spec

Item	Box			Carton		
	Measurement(mm)	Gross weight	Pcs/box	Measurement(mm)	Gross weight	Pcs/box
BR-TPL20W/30W-01-G2	L680*W105*H90	2.57kg	1	L700*W230*H300	15.42kg	6
BR-TPL30W/40W-01-G2	L980*W105*H90	2.96kg	1	L1000*W230*H210	11.84kg	4
BR-TPL40W/60W-01-G2	L1280*W105*H90	3.07kg	1	L1300*W230*H210	13.28kg	4
BR-TPL60W/80W-01-G2	L1580*W105*H90	4.12kg	1	L1600*W125*H210	8.24kg	2